



CURB REMOVAL

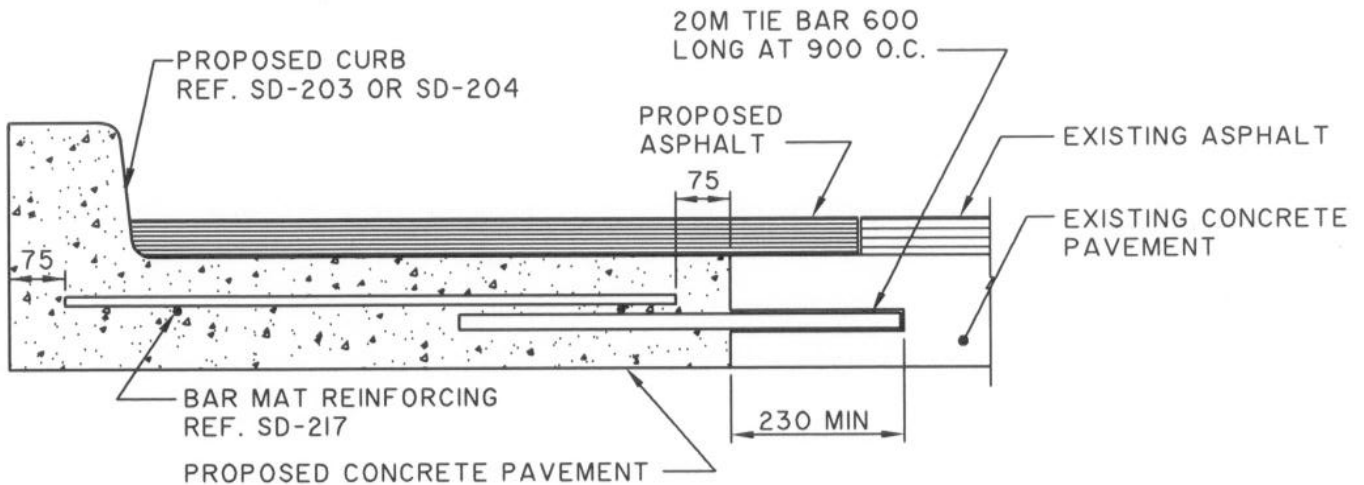

PAVEMENT WIDENING

- NOTE: 1. THIS DETAIL APPLIES TO PAVEMENTS WITH EXISTING SEPARATE CURBS. FOR PAVEMENTS WITH INTEGRAL CURBS, REFER TO SD-207.
2. REINFORCING STEEL IN EXISTING CURB TO BE REMOVED TO TOP OF EXISTING CONCRETE PAVEMENT.
3. TRANSVERSE SAW CUT EVERY 6.0 METRES OR AT PAVEMENT JOINTS.

DIMENSIONS ARE IN MILLIMETRES

 <p>THE CITY OF WINNIPEG PUBLIC WORKS DEPARTMENT</p>	Revisions			
	1.	JAN 03	GENERAL REVISION	lwb
Reference Spec. No. CW 3230, CW 3310	No.	Date	Description	By
<p>PAVEMENT WIDENING (CONCRETE PAVEMENTS c/w ASPHALT OVERLAY)</p>	Designed By:	Drawn By:	Scale :	
	Checked By:	Date:	Drawing No.	
	Approved:	SURFACE WORKS COMMITTEE		SD-208